LC-POWER

Gaming 995B - Light Box

Routing Hole

Use the routing holes for the cable managment on the back side of the mainboard tray.
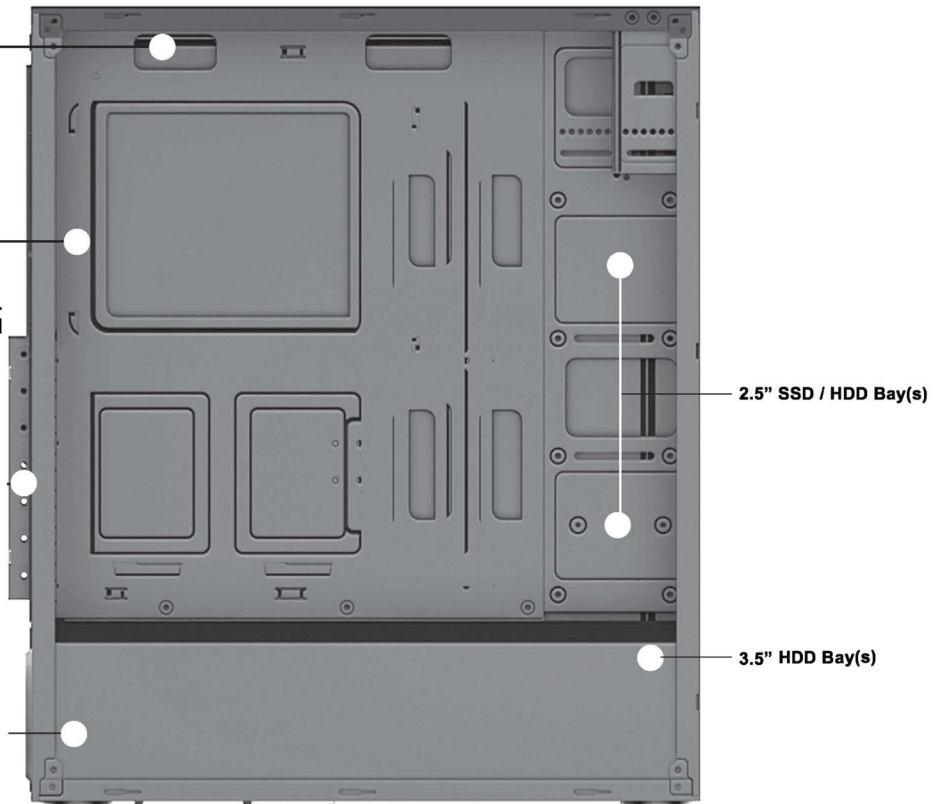
Motherboard Installation

1) Insert the copper pillars to suit your mainboard into the mainboard tray.
2) Insert the I/O shield which is included in the mainboard delivery.
3) Insert the mainboard and fix it with screws.

PCI Card Installation

To install a PCI card including PCI-E graphic cards, remove the PCI cover before the installation.

Power Supply Location

Ensure that the PSU fan faces down.

2.5" SSD / HDD Bay(s)

3.5" HDD Bay(s)

USB 3.0 Installation (Optional)

Connect the USB 3.0 connector to your mainboard. Consult your mainboard manual to locate the position of the USB 3.0 connector on your mainboard.

USB 2.0 Installation

Connect the USB 2.0 connector to your mainboard. Consult your mainboard manual to locate the position of the USB 2.0 connector on your mainboard.