



LC-POWER™

www.lc-power.com

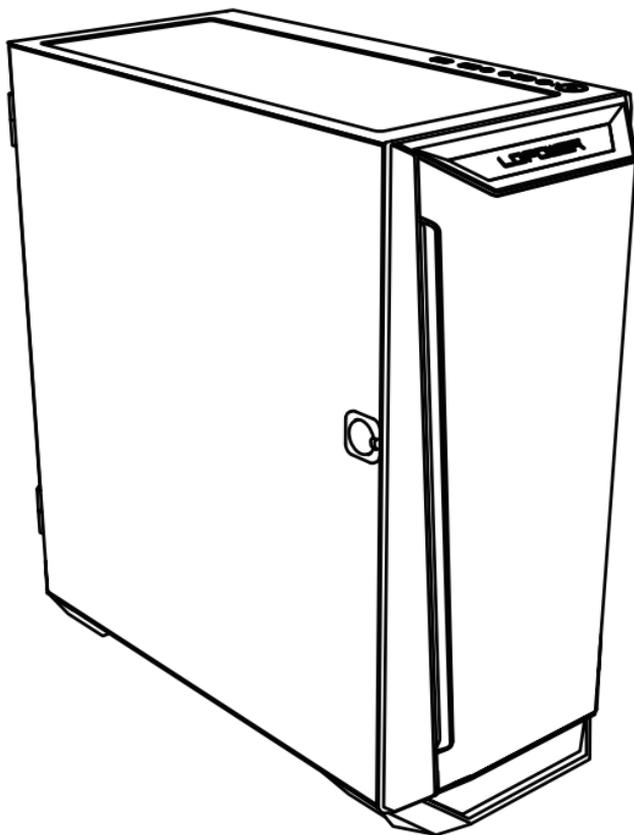

GAMING 805BW - Holo-1_X

User manual




- A: Removal of the front and side panels
- B: Installation of the power supply (PSU)
- C: Installation of the motherboard
- D: Installation of fan(s) and/or radiator(s)
- E: Installation of 3.5" HDDs
- F: Installation of 2.5" HDDs or SSDs
- G: Installing PCI / PCI-e card(s) and removing the expansion slot covers


Accessory bag



C




A

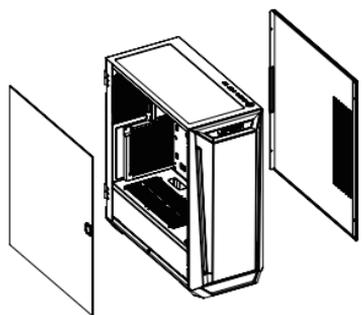

• Remove front and side panel retaining screws before attempting to remove either of the panels.



B

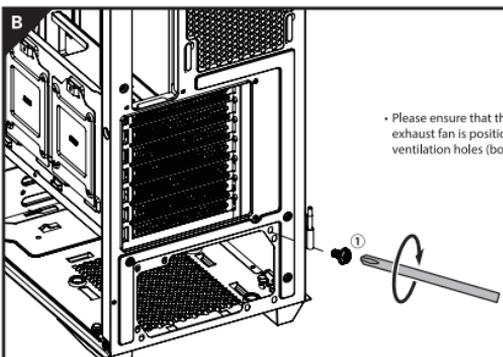


• Please ensure that the PSU intake or exhaust fan is positioned towards the ventilation holes (bottom) of the case.

• Ensure the copper mounting points are situated at the correct position for your motherboard, and secure with mounting screws (No.3).

• Note: Additional copper mounting points are provided if required.



D

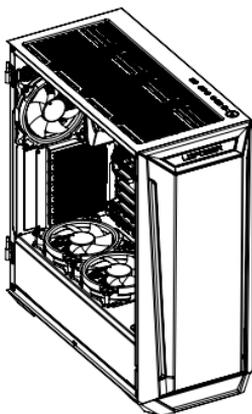

Fan installation:

Front:	3x 120 mm or 3x 140 mm
Top:	3x 120 mm or 2x 140 mm
Inside:	4x 120 mm
Rear:	1x 120 mm

Water cooling installation:


Front:	1x 240/280/360 mm
M/B tray:	1x 240 mm
Top:	1x 240/280/360 mm
Rear:	1x 120 mm

E




HDD installation:

- Unscrew and remove the HDD tray
- First, install a 2,5"/3,5" HDD on the top of the tray and fix it with screws (No. 4)
- Install a second 2,5"/3,5" HDD into the plastic tray
- Insert the complete HDD tray into the case and secure it with a thumbscrew

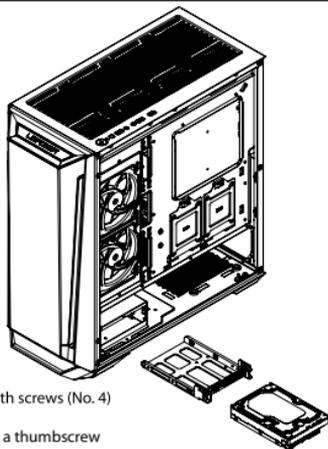


F

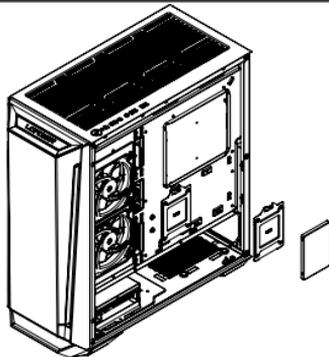


SSD installation:

- Unscrew and remove the lateral SSD tray
- Install a 2,5" SSD on the tray and fix the SSD with screws
- Fix the SSD tray to the case laterally and secure it with a thumbscrew


G

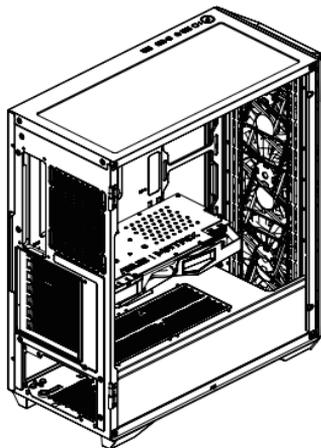

- Unscrew and remove the corresponding PCI expansion slot cover.
- Insert PCI / PCI-e card into your motherboard.
- Secure PCI / PCI-e card with screws provided (No.1).
- Adjust PCI / PCI-e card bracket to suit your card.



H.D.D LED - HDD LED
 +P & -P - Power LED
 POWER SW - Power Switch



Service & notes



Avoid direct sunlight and a high temperature environment, keep the case far away from fire and heat sources.

Keep it in dry places, keep it away from corrosiveness causing materials.

The product has a two year warranty period from the date of purchase, service issues will be handled by your dealer.

If the case is damaged due to improper operation, the warranty period expires immediately.

Check www.lc-power.com or contact us by e-mail at: service@lc-power.com.

Silent Power Electronics GmbH
 Formerweg 8, 47877 Willich, Germany

www.lc-power.com / service@lc-power.com / support@lc-power.com